


CARD BODY PRODUCTION TECHNOLOGY

PRODUCT OVERVIEW

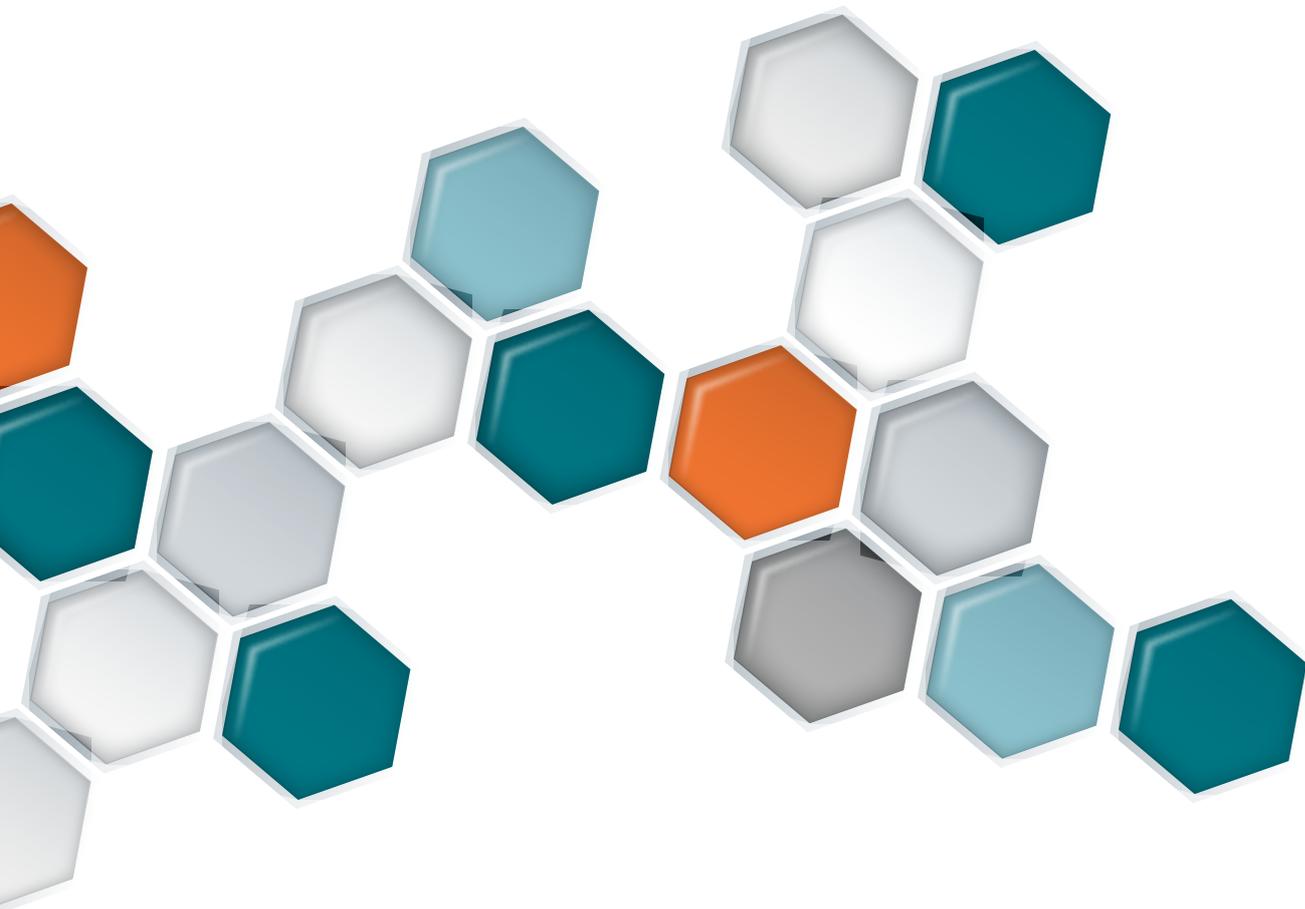

CONTENTS

MÜHLBAUER GROUP AT A GLANCE.....	4
MANUFACTURING EXECUTION SYSTEMS	6
TAPE LAYERING	
MAE 12	8
SHEET HOT STAMPING	
SSH 2008/2.....	10
ASH 10000.....	12
FOIL PUNCHING	
FP 201.....	14
INLAY PRODUCTION & TESTING	
MTT 2462.....	16
ITH 540 & IT 50	18
ITH 550	20
IAL 10000.....	22
SHEET COLLATING	
SSC 2502 & SSC 2502/1	24
SSC 200	26
SSC 2700	28
ASC 2900	30
ASC 3000	32
SHEET LAMINATING	
LP 5570.....	34
LP 5570 ecoLINE.....	36
CARD PUNCHING	
CP 202	38
CP 2007/A & CP 2007/M	40
CP 2021/A & CP 2021/M	42
CARD INSPECTION	
CI 100	44
CI 200	46
CI 36050	48
CARD HOT STAMPING	
CHS 6001.....	50
QUALITY ASSURANCE	52
PRODUCT PORTFOLIO	53
NOTES.....	54



MÜHLBAUER GROUP AT A GLANCE

MÜHLBAUER'S BUSINESS UNITS AND SITES

Founded in 1981 in the heart of Bavaria, the Mühlbauer Group has ever since grown to a leading global player in the fields of Parts & Systems, Semiconductor Related Products, Document Solution Related Products and TECURITY® Solutions. With around 3,500 employees, technology centers in Germany, Malaysia, Slovakia, the U.S.A. and Serbia and 35 sales and service locations worldwide, Mühlbauer created a strong competence network around the globe.

We continuously invest in the latest technologies and innovative processes to enhance our competences and provide you with optimized solutions. Our in-house precision part production MPS – Mühlbauer Parts & Systems – guarantees unlimited flexibility and highest customer satisfaction.

Our business unit AUTOMATION does not only develop and assemble individually customized production systems, but also provides matching software solutions for the production process of Document and Solution Related Products. Vision inspection technologies as well as semiconductor and RFID applications complete our comprehensive portfolio.

Our business unit TECURITY® is established as a competent partner for the implementation of security systems for identifying and verifying both documents and individuals. Our clients benefit from more than three decades experiential value which we have gained during the realization of over 300 ID projects worldwide.



MPS
Precision Parts & Surface Engineering



AUTOMATION
Production Equipment & Systems



WORLD OF TECURITY®
Government & Technology Solutions



MANUFACTURING EXECUTION SYSTEMS

MB MCES PERSONALIZATION MANAGEMENT

MB MCES is a personalization management software, which integrates incoming data with product definitions and controls the associated physical and electrical personalization processes. MB MCES handles personalization data from a variety of different input methods and formats.

MB INCAPE INTEGRATED PRODUCTION MANAGEMENT SOFTWARE

MB INCAPE is Mühlbauer's Production Management Software for the production and personalization of electronic cards and documents (e.g. ID cards, ePassports, Driver's Licenses, EMV or GSM cards). Combining data management, production control and material management, the system allows for highly automated processes. It processes customer- and application-specific production, personalization, quality control and document delivery scenarios with highest solution flexibility.

MB PalaMax® TOTAL PROCESS TRANSPARENCY

MB PalaMax®, Mühlbauer's Smart Factory solution, is developed for card, tag or booklet productions, personalization factories and semiconductor backend shop floors to set and collect process data to monitor and improve the efficiency of production and personalization for later processing, visualization and statistical analysis.

MB tool.Leader CONNECTOR BETWEEN SYSTEMS

MB tool.Leader is a software package which consists of several applications and serves as a reliable link between the individual systems involved in the production process. By means of MB tool.Leader, the entire process chain – from the incoming order to the final precision part – can easily be monitored and controlled. This real-time machine monitoring guarantees an automated production process. Production errors can be detected and solved at an early stage. Thus, MB tool.Leader reduces the machine downtimes, which in turn leads to an increase of the machine's productivity by up to 20 percent.

FEATURES & ADVANTAGES

-  Configurable workflow steps regarding personalization, quality assurance & issuance
-  Fully-automated processing & production management
-  Scalability regarding different documents, machines & personalization locations
-  Flawless integration of Mühlbauer's material management system (MB WAREHOUSE)
-  Connection to card / document management systems via web service, database, file-based interface
-  Standard interface to personalization machines with integration of third-party machines possible
-  Integration of MB User Management
-  Full coverage of production control requirements (security industry & EMV standards)
-  Seamless connection to MB PalaMax® & MB Data Preparation
-  Simplified administration due to web-based operator clients
-  Monitoring of real-time performance of the production
-  Seamless tracking of documents from point of production to issuance
-  Statistical tool analyze collected data & deliver customized statistics on OEE
-  Tool which enables the remote operation of machines on the shop floor from a control centre
-  Tool which increases effectiveness & efficiency so that production becomes more profitable
-  Enables production engineering to prepare & test a repeatable factory set-up. Factories can switch between products within minutes.



MAE 12

TAPE LAYERING SYSTEM

Mühlbauer's MAE 12 tape layering system is a flexible solution for applying magnetic and signature stripes as well as security stripes onto sheets. This additional process step completes the card and Smart Card production from one source. In the tape layering process, up to 12 magnetic stripes are transferred onto overlay foils. Using 12 tracks, this machine can produce up to 72,000 cards per hour via processing from reel-to-reel and optionally from reel-to-sheet. This is based on an overlay thickness

range of 40 to 400 microns and a width of 780 mm. The magnetic stripes are pressed, using their full width, onto the overlay material. The MAE 12 provides full adhesion to the stripes for safe handling of the sheets and the elimination of any variation of the stripe location during lamination. The MAE 12 is designed to accommodate different stripe widths and spacing. Intuitive operational handling and easy maintenance also maximize the efficiency.



KEY FEATURES

-  Reel input
-  Foil alignment
-  Tape application
-  Thermal processing
-  Reel output (optional sheet output)

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic application of signature stripes & magnetic stripes for bank cards, ID cards, loyalty cards etc.
- High flexibility in terms of sheet size, tape materials, positioning & quantity of tracks
- Cost-efficient solution especially for high-volume production
- Sensor controlled alignment system for overlay referenced to edge
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Reel-to-reel or reel-to-sheet (can be modified)
- Integrated spooling systems for different stripe-substrate
- Continuously adjustable processing speed & temperature
- Operator-friendly & fast adjustment of track positions
- Material buffer for high autonomy
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS; others on request
- Thickness of layers: 40 – 400 μm
- Max. width of foil: 780 mm
- Max. reel diameter: 750 mm
- Height of output stack: 200 mm
- Application pressure / temperature: 30 – 55 N / max. 200°C
- Max. widths of stripes: min 6 mm to max 16 mm
- Number of application tracks: up to 12
- Application accuracy: +/- 0.15 mm in y-axis
- Distance of tracks: \geq 57 mm
- Sheet cutting accuracy: +/- 0.5 mm
- Speed: Max. 10 m / min (12-fold format)
- Throughput: 72,000 cards per hour



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



SSH 2008/2

SHEET HOT STAMPING

The SSH 2008/2 is the second generation of Mühlbauer's proven semi-automatic hot-stamping machine for sheets. DOVIDs like holograms and other heat-activatable features can be applied on plastic sheets. The holograms can be applied either on the surface of a final product or on a single sheet layer

which will be laminated to a final sheet in a later step. Thus, the hologram can be hidden inside the material structure as a forgery-proof security element. The SSH 2008/2 is preferably used for the production of embedded holograms for security documents like ID cards or passports.



KEY MODULES

-  x/y sheet table
-  Hot stamping unit (1 head)
-  DOVID application

FEATURES & TECHNICAL DATA

KEY FEATURES

- Semi-automatic sheet hot stamping system for applying holograms or KINEGRAMs® on overlay or core sheets
- The system can be matched with different products & layouts in very short time production surroundings
- All necessary parameters, (temperature, pressure & time) can be set according to different materials
- Highest security due to hologram / KINEGRAM® under the overlay
- Highest flexibility for various applications & customization like vision, barcode reader or OCR
- Highest accuracy for hologram / KINEGRAM® applications
- Operator-friendly handling system
- Flexibility due to adjustable & storable process parameters
- No offset between hologram / KINEGRAM® & card layout

PRODUCTIVITY / PROCESS UNITS

- Vacuum table for moving sheet from a loading position to all application positions in sequence & aligning sheets to a reference edge & clamping sheets by vacuum
- Feeding & positioning the tape under the application head by means of a tape spooler
- Special sensor placed in the stamping position for hologram positioning to print mark
- Pneumatic-driven application head allows a programmable adjustment of the press force, stamp temperature & dwell time
- Sharp edges of the applied holograms without flakes offered by special foil stripper
- Stamping tool for standard geometry for simple standard shapes (circle, rectangle with rounded corner, oval), for customized dimensions or for special geometry (optional)
- DOVID tape destruction before rewinding (with cutter to slit stamped hologram foil)

TECHNICAL DATA

- Sheet size: max. 630 x 630 mm
- Width of DOVID tape: max. 45 mm
- Core diameter: 1" or 3"
- Reel diameter: max. 120 mm
- Stamp size: max. ø 20 mm
- Hot stamping force: up to 3 kN
- Position accuracy: ± 0.1 mm
- Hot-stamping temperature: 20 - 170° C



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



ASH 10000

SHEET HOT STAMPING

Mühlbauer's ASH 10000 is designed for hot stamping of DOVIDs and security foils in defined position and pitching them onto plastic sheets. These DOVIDs are mainly applied on the backside of an overlay foil or on the printed core layer.

Both principles are providing the possibility to embed DOVIDs inside of the card structure, no matter if the foil is an overlay or a core material. The machine's main area of application is on ID-1 and polycarbonate cards.



KEY MODULES

-  Reel or sheet input
-  DOVID application
-  Hot stamping unit (4-8 heads)
-  Cleaning module
-  Vision control system (optional)
-  Cutting unit - reel-to-sheet
-  Reel or sheet output

FEATURES & TECHNICAL DATA

KEY FEATURES

- Fully automatic sheet hot stamping system DOVID and security foils in defined position & pitch onto plastic sheets
- Hologram / KINEGRAM® applied under the overlay to achieve a highly durable security feature (up to level 3)
- Temperature & pressure can individually be set for each application head
- Hologram applied to the overlay foil by pressure & temperature

PRODUCTIVITY / PROCESS UNITS

- Input material supplied in reel (R2R, R2S) or sheet form (S2S)
- Reel slit into sheet size by sheet cutting unit (R2S)
- Alignment of foil & smooth transport through the machine
- Applying hologram from holo foil to sheet
- Standard - 4 hot-stamp heads, optional up to 8 hot-stamp-heads (sheet layout)
- Process quality checked by a vision system (optional)
- Bad holograms marked by a bad unit marker
- Collection of incorrect sheets in reject box
- Foil rewound onto the output foil spooler (R2R) or sheets are stacked in the output stacker (R2R, S2S)

TECHNICAL DATA

Input from reel (R2S, R2S); output to reel (R2R):

- Reel diameter: max. 500 mm
- Reel width: max. 630 mm
- Core diameter: 76 mm (3")
- Application temperature: RT -170°C
- Throughput: up to 10.000 UPH

Input Stacker & Alignment Unit (S2S):

- Max. height of sheet stacks: 700 mm
- Sheet Size: min. 270 mm x 194 mm
- Sheet Size: max. 630 mm x 630 mm
- Sheet materials: PVC, ABS, PC, paper: ≥ 0.075mm

Hologram Size:

- Typical stamping tool size: max. ø 20 mm for standard thermal hologram foils



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



FP 201

FOIL PUNCHING SYSTEM

Mühlbauer's FP 201 is a semi-automatic system to punch thin plastic material. It is the ideal solution for low-cost punching of compensation layers for contactless cards, hybrid cards and RFID tickets.

Additionally, the FP 201 can be used for the production of windows in eCover inlays. As you can place more foils in one cycle, a throughput up to 300 foils per hour can be achieved.



FEATURES & TECHNICAL DATA

KEY FEATURES

- Manual input sheet
- Punching in one stroke with highest accuracy
- Manual sheet output
- In-house tool manufacturing for highest flexibility of tools
- Special / customized tool design
- Fast in-house regrinding service
- Most proven punching system for various materials

PRODUCTIVITY / PROCESS UNITS

- Hydro-pneumatic driven punching system (direct drive)
- No electricity: easiest operation & maintenance
- Availability: up to 95%
- Yield: up to 99.7%
- Alignment to reference pins

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS, PET; others on request
- Sheet size max.: 350 mm x 500 mm
- Sheet thickness: 50 μ m - 300 μ m
- Punch drive: Hydro-pneumatic driven (air pressure connection 6 bar)
- Punching accuracy tool: +/- 0.02 mm
- Punching accuracy position: +/- 0.1 mm
- Throughput: up to 300 sheets per hour

KEY MODULES



Manual foil input



Automatic waste output



Foil punching unit



Manual foil output

- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



MTT 2462

WIRE EMBEDDING & RFID INLAY PRODUCTION SYSTEM

Mühlbauer's Wire Embedding and RFID Inlay Production System MTT covers all production processes in one: chip punching, chip module implanting, ultrasonic wire embedding, thermo-compression chip welding and electrical as well as optical test followed by bad unit marking. The MTT is a robust and proven solution with already 100 systems sold worldwide.

RFID inlays for any ePassport and Smart Card application can be produced: whether it is ID-1 or ID-3 format, or for hybrid, dual interface and contactless cards. The automatic sheet sorting process separates good sheets from rejected sheets. The rejected sheets can then easily be reworked through a special machine software mode.



KEY MODULES

- | | | |
|---|---|--|
|  Automatic sheet feeding |  Ultrasonic wire embedding |  Optical quality check and bad unit marking |
|  Reject module detection by vision |  Thermo-compression chip welding |  Automatic sheet unloading |
|  Chip module punching |  Contactless test |  Sorting of good / rejected sheets |
|  Chip module implanting | | |

FEATURES & TECHNICAL DATA

KEY FEATURES

- All-in-one solution for wire embedding & RFID inlay production
- Know-How regarding antenna design & sheet layout is completely kept in-house
- Easy import of CAD data
- Any antenna geometry is possible, including meander
- Powerful design software for easy creation of new antenna layouts
- High stability without any adhesive; vacuum is used instead
- Electrical optical testing incl. bad unit marking
- Rejected sheets can easily be reworked by MTT's "rework mode"
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Automatic sheet placement line +/- 0,1 mm
- Fully automatic sheet feeding with vacuum tables
- Pick & place unit capable of handling any chip size on the market
- Direct removal of bad chips detected by vision
- Pneumatic shuttle system for smooth transport of antennas
- IC modules can be placed in mold-up & mold-down mode, without any major modifications on the machine
- Ultrasonic wire embedding only or in combination with contactless chip embedding; adjustable control units for embedding & bonding; highest precision through linear motor in both x- & y-direction with longest lifetime
- Thermo Compression Welding: up to 6 combi heads incl. thermo compression welding and wire break control sensors for standard applications
- For dual interface cards up to 8 slim-head ultrasonic wire embedding possible incl. wire break control sensors
- Yield: up to 99.7%
- Real* wire embedding repeatability: less than +/- 0,05 mm
- Real* chip embedding repeatability: less than +/- 0,05 mm
- Real* thermo compression repeatability of welding less than +/- 0,01 mm
(* the real repeatability of linear motors is on +/- 6 mm)

TECHNICAL DATA

- Materials: PETG, PVC, Polycarbonate, Teslin, paper; others on request
- Max. sheet size: 600 x 600 mm - others on request
- Sheet thickness: 0.1 – 0.3 mm (others on request)
- Wire thickness: 0.08 – 0.12 mm
- Module tape: 35 mm; reel diameter max. 330 mm
- Spacer tape: 35 mm; reel diameter max. 330 mm
- Throughput: up to 1,800 contactless inlays per hour; up to 2,300 dual interface inlays per hour; depending on antenna design & material



- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



ITH 540 & IT 50

INLAY TEST HANDLING & INLAY TESTING SYSTEMS

The inlay test handler ITH 540 is a semi-automatic machine for the testing of transponders integrated in sheets. The system is well-proven, easy-to-operate and offers the possibility to freely program different sheet layouts. Testing and pre-personalization of RFID pre-laminated sheets, collated sheets, laminated sheets and inlay sheets have significantly been simplified. The integrated ETS-surface for ergonomic operations guarantees convenient functionality for operators. Running costs are reduced by the machine's maintenance-friendly, long-lifetime construction.

The IT 50 inlay tester is used to manually check the functionality of the transponders integrated into sheets. The simple device offers highest flexibility as it can be transported to any location and allows an operator to quickly determine if the antenna is defect. Two LEDs indicate the test results; green indicates a functional antenna, whereas red indicates a defect. Damaged antennas are then be marked to ensure all antennas used in production are fully functional.



ITH 540



IT 50

KEY MODULES



Y-axis sheet table



Reject marking



Contactless test station

FEATURES & TECHNICAL DATA

KEY FEATURES

ITH 540

- Realization of testing & pre-personalization
- High flexibility regarding materials & sheet layouts
- Operator-friendly
- Automatic reject marking
- Automatic counting of functional & rejected antennas

IT 50

- Manual inlay testing device
- Test based on ATS (Answer To Select) test of antennas
- Configuration is adjustable to customer requirements according to ISO 14443A or ISO 14443B

PRODUCTIVITY / PROCESS UNITS

ITH 540

- Y-axis sheet table
- Contactless testing station
- Reject marking
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Max. sheet size: 800 x 800 mm
- Sheet thickness: 0.10 to 1.00 mm (others on request)
- Configuration: adjustable to customer requirements according to ISO 14443 A or B
- Throughput: Up to 1,000 sheets per hour; depending on material & test parameters, as well as on operator speed

- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



ITH 550

AUTOMATIC INLAY TEST HANDLING

The inlay test handler ITH 550 is a fully automatic machine for the testing of transponders integrated in sheets. The system is well-proven, easy-to-operate and designed to test different sheet layouts. The Testing and pre-personalization of RFID pre-laminat-

ed sheets or finalized sheets significantly been simplified. The integrated ETS-surface for ergonomic operations guarantees convenient functionality for operators. Running costs are reduced by the machine's maintenance-friendly, long-lifetime construction.



KEY MODULES



Input feeder



Reject marking



Contactless test station



Output stacker



Vision inspection

FEATURES & TECHNICAL DATA

KEY FEATURES

- Realization of testing & pre-personalization
- High flexibility regarding materials & sheet layouts
- Operator-friendly
- Automatic reject marking
- Automatic counting of functional & rejected antennas

PRODUCTIVITY / PROCESS UNITS

- Input stack & sheet feeder
- Automatic sheet transport
- Contactless testing station
- Optical antenna & hologram inspection (optional)
- Reject marking
- Output stacker & reject box
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Max. sheet size: 650 x 650 mm
- Sheet thickness: 0.20 to 0.80 mm (others on request)
- Configuration: adjustable to customer requirements according to ISO 14443 A or B
- Throughput: Up to 10,000 sheets per hour; depending on material per test parameters as well as on operator speed

TAPE LAYERING

SHEET HOT STAMPING

FOIL PUNCHING

INLAY PRODUCTION & TESTING

SHEET COLLATING

SHEET LAMINATION

CARD PUNCHING

CARD INSPECTION

CARD HOT STAMPING

UPH

8000 9000 10000 11000 12000 13000



IAL 10000

INLAY ASSEMBLY LINE

IAL 10000, Mühlbauer's Inlay Assembly Line, is the first of its kind which can process unlaminated sheets. IAL 10000 supports ID-1, ID-3 documents and even customized form factors and includes Mühlbauer's new graphical interface for highest operator and maintenance convenience. The machine is operated by means of a touchscreen terminal. The inlay production process starts with the antenna creation, chip placement and all

the necessary electrical and / or vision tests – including marking of bad units and placing them in a reject box). This is followed by the collating process, during which various layers (number, material and thickness of layers may vary) are piled up, and the welding. IAL 10000 is a highly modular machine which can be tailored to the individual project requirements.



KEY MODULES

-  Foil Input
-  Cutting & Punching
-  Glue dispensing
-  Chip application
-  Wire embedding
-  Welding: wire to chip
-  Electronic test
-  Vision inspection
-  Collating unit
-  Unlam output

FEATURES & TECHNICAL DATA

KEY FEATURES

- Roll-to-Sheet, Sheet-to-Sheet, Roll-to-Roll
- Complete inlay assembly (including card / e-holder page layer collating)
- Fully modular as the process requests
- Wide format: 750 x 750 mm
- Automatic angle X, Y adjustment by vision system on various machine stations
- Inlay quality assurance: vision inspection and/or electrical test (ATS or RFM), bad mark printer, reject tray


PRODUCTIVITY / PROCESS UNITS

- Raw material is unwound from roll or sheets inserted into input stacker
- Reference holes & chip cavities are punched; then the foil is cut into sheets
- Glue is applied beside the chip cavities for chip fixation
- Chips are electrically tested before punching & placing them into cavities (optional)
- Vision system for detection of reject module, tape position & tape orientation
- Applying of the antenna is done by an ultrasonic wire embedding system with up to 12 heads per embedding module (optional: 2 embedding modules)
- Antenna wires are welded to chips
- Inspection by an optical inspection system and/or an electrical system, bad marked inlays are rejected into an integrated bin
- Manual rework of rejected inlays is possible. (alternatively: MTT 2462)
- Feeding & collating of additional compensation layer
- Feeding & collating of overlay from top and/or bottom

TECHNICAL DATA

- Sheet size: 190 x 190 mm, up to 750 x 750 mm
- Possible substrate materials: ABS, PC, PVC, PETG, Teslin, others on request
- Machine configurations: standard 4 heads; up to 24 heads
- Antenna types: Contactless, Dual Interface, Coil on Module (inductive coupling), Dipole

- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



SSC 2502 & SSC 2502/1

SEMI-AUTOMATIC SHEET COLLATING SYSTEMS

Mühlbauer's semi-automatic operated sheet collating system SSC 2502 is designed for the gathering and pre-fixing of plastic foils into sheets ready for lamination. Distinguished by its high flexibility the SSC 2502 is versatile and easy-to-handle. A swivel table along with a vertically adjustable frame and a foot switch operation method make the equipment easy to use for any operator. Adjustable edge guides and additional thermal welding units allow for the collation of a wide variety of products, including sheet sets containing contactless inlets.

The manually operated sheet collating system SSC 2502/1 is also designed for collating and welding of plastic foils into sheets ready for lamination. The system is flexibly adjustable in height and table position and thus guarantees operator-friendliness. The layers are manually aligned to reference edges and prefixed manually with an ultrasonic welding unit. This allows for the simultaneous prefixing of a complete set in less than one second and for the setting of a random number of spots. After the collating process the prefixed sheets are manually removed by the operator.



SSC 2502



SSC 2502/1

KEY MODULES

-  Ultrasonic welding unit (SSC 2502/1)
-  Thermal welding unit (SSC 2502)
-  Adjustable stop pins

-  Illumination (SSC 2502/1)
-  Swivel mounted table
-  Parameter control (SSC 2502)

FEATURES & TECHNICAL DATA

KEY FEATURES

- Semi-automatic operated collating system for individual sheet layers & security layers
- Suitable for standard collating tasks & security applications
- Smallest footprint requirements & easy operation
- Easy set-up & maintenance
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Alignment of sheet layers based on cutting edge of the sheet
- Adjustable stop-pins on table
- SSC 2502/1 – manual ultrasonic welding unit
- SSC 2502 – foot switch operated thermal welding
- Adjustable welding temperature
- Availability: up to 95%
- Yield: up to 99.7%
- Environmental conditions:
Room temperature: 23°C; +/-3°C
Humidity: 50%; +/-10%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS; others on request
- Sheet size min. / max.: 290 x 290 mm / 800 x 800 mm
- Sheet thickness min. / max.: 50 - 400 µm
- Max. collating thickness: up to 1 mm
- Max. welding temperature: up to 450°C
- Throughput: Up to 100 sheets per hour; depending on material & operator

- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



SSC 200

SEMI-AUTOMATIC SHEET COLLATING SYSTEMS

Mühlbauer's SSC 200 machine concept is as simple as it is ingenious. Only one operator gathers the core sheets before manually aligning them manually at the adjustable stop pins. The machine works individual independently from material and thickness. Depending on requirements, overlays from top and bottom are delivered from reel.

The manually collated core sheets are securely fixed to the automatic fed overlay by two ultrasonic welding systems before the complete set is cut and transferred to the output stacker. The SSC 200 is controlled by one operating panel which also stores pre-set production configurations.



FEATURES & TECHNICAL DATA

KEY FEATURES

- Semi-automatic collating system for high volumes
- Automatic feeding & positioning for overlay from reel
- Automatic transport & cutting system
- Automatic welding parameter control
- Manual feeding & alignment to reference edges of core layers in sheet format
- Easy set-up & maintenance
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Integrated spooling systems for overlay foil
- Integrated register punch for lamination of CLI / MLI feature (optional)
- Sensor-controlled alignment of overlay to edge or magstripe
- Two adjustable ultrasonic welding units
- Adjustable stop pins
- UV-illumination system to check security feature (optional)
- Thickness measurement system to avoid double sheets (optional)
- Cutting unit after welding position
- Sensor-controlled overlay alignment to edge or magstripe position
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS
- Overlay thickness: 40 – 300 μm
- Width of overlay reel: max. 720 mm
- Reel diameter / core diameter: max. 750 mm / 76 mm
- Center layers min. / max. sheet size: 290 x 290 mm / 720 x 720 mm
- Center layers min. / max. thickness: 45 - 600 μm
- Alignment accuracy: +/- 250 μm
- Throughput: up to 400 sheets per hour; depending on material & operator

KEY MODULES

- | | |
|---|---|
|  Manual sheet alignment table |  Parameter control |
|  Automatic overlay spooling unit |  Cutting unit |
|  Ultrasonic welding unit |  Sheet stacker |

- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



SSC 2700

SEMI-AUTOMATIC SHEET COLLATING SYSTEMS

Mühlbauer's semi-automatic sheet collating system SSC 2700 is designed for the gathering and pre-fixing of plastic foils into sheets ready for lamination. Besides being versatile, the SSC 2700 stands out by its precision and accuracy. An integrated vision system ensures that only sheets that are perfectly aligned

to the print marks are collated. Additional thermal welding units and vision systems allow for the collation of a wide variety of products, including sheet sets containing contactless inlets and / or magnetic stripes.



KEY MODULES

- Sheet storage
- Vision inspection
- Two welding units
- Vacuum table
- Parameter control

FEATURES & TECHNICAL DATA

KEY FEATURES

- Semi-automatic collating system for individual sheet layers & security layers
- Suitable for standard collating tasks & security applications requiring vision controlled positioning processes
- Most precise vision-controlled alignment of sheet layers
- Smallest footprint requirement & easy operation
- Each single layer parameter is individually programmable (correct sequence)
- Material shelf for ergonomic supply of sheets (optional)
- Programmable welding position, time & temperature
- Up to 7 different welding positions programmable
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS


- Vision system for high-precise sheet alignment of front & back-side print
- Alignment to print marks, antenna pads, security features or other visible features on the layers
- Integrated register punch for lamination of CLI / MLI feature (optional)
- UV-illumination system available to check presence of UV-print (optional)
- thickness measurements to avoid double sheets (optional)
- Up to three independent alignment camera systems
- Two thermal welding units from top, (optionally from top and bottom)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS; others on request
- Sheet size min. / max.: 290 x 290 mm / 750 x 750 mm
- Sheet thickness min. / max.: 50 - 400 μ m
- Max. collating thickness: up to 1 mm
- Max. welding temperature: up to 400°C
- Welding time / force: 0 - 10 sec / 78 - 188 N
- Throughput: up to 100 sheets per hour; depending on material & operator



- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



ASC 2900

AUTOMATIC SHEET COLLATING SYSTEM

Mühlbauer's ASC 2900 is a fully automatic, completely flexible sheet collating system. Due to its modular design the system can collate up to 5 core layers from sheet and 2 overlays from reel. Due to its high-precision optical collating process this machine is suitable for contactless, dual interface and other high-level cards, such as ID or EMV applications. This

fully-automated system offers a throughput of up to 700 sheets per hour. Despite machine's complete automation the ASC 2900 still allows flexible usage for the producer. The easy change-over between different materials and the handling of up to five core layers, enable the programming of a variety of product configurations.



KEY MODULES

-  Automatic sheet feeding system
-  Automatic overlay feeding system
-  Movable control panel
-  Vision system for print mark alignment
-  Ultrasonic foil welding
-  Cutting unit
-  Sheet stacker

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic high-speed sheet collating system
- Feeding of overlay from reel
- High-precision alignment by vision systems
- Proven solution for high-end products like security documents or contactless cards
- Alignment programmable to print marks, antenna pads, security features or other individual shapes on the layers
- Sheet-to-sheet handling system for core layers
- Output of collated & pre-fixed sheet to stacker system
- Modular design for flexible configuration of individual collating-units (on-site upgrade / extension possible)
- Up to 7 layers possible
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Spooling system for two overlay foils on reels
- Continuous edge control system for magnetic stripe overlays
- Double sheet detection by ultrasonic sensor
- Cutter unit after welding position
- Ultrasonic welding system
- Vision-controlled alignment system
- Thickness measurement unit (optional)
- Integrated register punch for lamination of CLI / MLI feature (optional)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, PET; others on request
- Alignment accuracy: +/- 150 μ m
- Width of overlay: max. 720 mm
- Reel diameter: max. 750 mm
- Sheet size max.: 720 x 720 mm
- Sheet thickness: overlay \geq 50 μ m / core \geq 100 μ m
- Throughput: up to 700 sheets per hour; depending on material & layout



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



ASC 3000

AUTOMATIC SHEET COLLATING SYSTEM

Mühlbauer's ASC 3000 is a fully automatic sheet-to-sheet handling system and can be adjusted to different sheet sizes or number of layers within a short amount of time. Depending on your individual customer requirements, the machine can be configured with a left-or-right orientated delivery device. Due to its high-precision collating process this machine is suitable for contactless, dual

interface and other high-level cards, such as ID or EMV applications. This fully automated system offers a throughput of up to 1300 sets per hour. The easy change-over between different materials and the handling of up to nine core layers enable a variety of product configurations.



KEY MODULES



Automatic sheet feeding system



Ultrasonic foil welding



Alignment to edge



Output sheet stacker

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic, high-speed sheet collating system
- High-precision alignment to edge
- Sheet-to-sheet handling system for all layers
- Right or left machine configuration available
- Input feeding & collating unit (up to 9 stacks possible)
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Sliced sheets placed on stacking units & placed to the separation position by a lift
- Suction cups & blast air are used to separate the sheets
- Control for double or missing sheets
- Alignment system in X & Y direction referenced to edge
- Ultrasonic welding of set
- Thickness measurement unit (optional)
- Output of collated & pre-fixed sheets to stacker system
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Foil materials: PVC, PC, ABS, Teslin, others on request
- Thickness: 100 – 400 μm
- Stacking level input: up to 450 mm each
- Stacking level output: up to 600 mm
- Collating accuracy: +/- 0,15 mm
- Welding process: ultrasonic
- Welding time: up to 5 sec.
- Number of spots 2 or 4 (optional)
- Throughput: up to 1300 sets per hour; depending on material & layout

- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



LP 5570

SHEET LAMINATION SYSTEM FOR COMPLEX CARD CONSTRUCTIONS

Mühlbauer's lamination system LP 5570 is perfectly suited for complex card constructions such as high security cards. It is designed to laminate pre-lams, plastic cards, Smart Cards and contactless cards. The system complies with the latest demands regarding economics, sustainability as well as product and process quality. All important process parameters such as temperature, pressure and cycle time are controlled continuously and individually controlled. These features make it possible to

laminate under optimal conditions with all current card materials such as ABS, PVC PC, PET, PETG, PS, PE, and PP. Available options are weight compensation and a vacuum chamber for the hot press, which allows for the lamination of more complex cards. The LP 5570 can be configured with four, six or eight openings and each system is capable of holding between six and twelve layers per opening depending on the production material.



KEY MODULES

-  Automatic loading and unloading basket
-  Semi or fully automatic handling of cassettes
-  Lamination press
-  Press force reduction
-  Freely programmable process parameter
-  Product temperature measurement
-  Vacuum
-  Cooling unit
-  Weight compensation
-  Thermal oil heating

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic, full-size sheet lamination system
- Suitable for complex card constructions like ID & other high security cards
- Available as single or twin stack
- Fully modular system design
- Wide range of programmable process parameters
- Intuitive human interface ensuring easy & efficient system & process handling
- Optimized energy management system for environmentally friendly & cost-saving operation
- Uniquely designed heating plates for perfect homogenous temperature conditions
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Up to eight openings
- Vacuum system (optional)
- Weight compensation system (optional)
- Average heat variation on heating plates: +/- 1°C
- Average heat variation overall heating plates: +/- 3°C
- Special temperature management
- Programmable cycle-time, lamination pressure & temperature
- New product-parameter teach; set-up in just five minutes
- Heating & cooling in both presses possible (optional)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS; others on request
- Sheet sizes: 600 x 790 mm (other size on request)
- Openings: 4, 6 or 8
- Lamination force / pressure: 50 – 1,250 kN
- Repeat accuracy: +/- 0.5%
- Temperature tolerance: +/- 1°C
- Surface finish (ground): ≤ 1.2 μm
- Throughput: up to 144 (SINGLE STACK) / 288 (TWIN STACK) sheets per hour; depending on material & layout



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



LP 5570/ecoLINE

SHEET LAMINATION SYSTEM FOR PVC & PC VOLUME PRODUCTION

Mühlbauer's lamination system LP 5570/ecoLINE is perfectly suited for PVC and PC volume production tasks. It is designed to laminate pre-lams, holderpages and similar products such as plastic cards, Smart Cards and contactless cards. The system complies with the latest demands regarding economics sustainability as well as product and process quality. All important process parameters such as temperature, pressure and cycle time are continuously and individually controlled. These features make

it possible to laminate under optimal conditions with all current card materials such as ABS, PVC, PC, PET, PETG, PS, PE and PP. An available option is the weight compensation for the hot press, which allows for the lamination of plastic cards. The LP 5570/ecoLINE can be configured with eight or ten openings and both systems are capable of holding between six and twelve layers per opening depending on production material.



KEY MODULES

- Automatic loading & unloading basket
- Semi or fully automatic handling of cassettes
- Lamination press
- Press force reduction
- Freely programmable process parameter
- Product temperature measurement
- Cooling unit
- Weight compensation
- Thermal oil heating

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic, full-size sheet lamination system
- Available as twin stack
- Features the most accurate heating technology worldwide
- Suitable for PVC volume production
- Wide range of PC programmable process parameters
- Intuitive human interface ensuring easy & efficient system & process handling
- Optimized energy management system for environmentally friendly & cost-saving operation
- Uniquely designed heating plates for perfect homogenous temperature conditions
- Modular system design
- MB INCAPE ready


PRODUCTIVITY / PROCESS UNITS

- Eight or ten openings
- Weight compensation system (optional)
- Average heat variation on heating plates: +/- 1°C
- Average heat variation overall heating plates: +/- 3°C
- Special temperature management
- Programmable cycle time, lamination pressure & temperature
- New product-parameter teach; set-up in just five minutes
- Heating & cooling in both presses possible (optional)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS; others on request
- Sheet sizes: 620 x 720 mm (other size on request)
- Openings: 8 / 10
- Lamination force / hot press: 25 – 630 kN
- Lamination force / cooling press: 50 – 1,250 kN
- Repeat accuracy: +/- 0.5%
- Temperature tolerance: +/- 1°C
- Surface finish (ground): ≤ 1.2 μm
- Throughput: up to 350 sheets per hour; depending on material & layout

- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



CP 202

CARD PUNCHING SYSTEM

Mühlbauer's fully-automatic card punching system CP 202 is designed for the punching of plastic cards from sheets. The system is suitable for medium to high-volume production of standard ID-1 cards. The electric-driven punching system ensures continuous precision with alignment to print mark and the tools

are well-proven with an extremely long life cycle. The possibility to choose between 3-up or 4-up punching layouts offers flexibility. The optimized design allows for a quick and easy change over time. Depending on configuration and material this system can reach a throughput of up to 16,000 cards per hour.



KEY MODULES

-  Sheet input
-  Automatic skeleton ejection
-  Sheet alignment
-  Magazine card output
-  Punching unit

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic card punching & sheet feeding
- Optical sheet alignment & positioning system ensuring highest punching accuracy
- In-house tool manufacturing assuring highest life-cycle of tools
- Fast in-house regrinding service
- Intuitive user interface for easy operation
- Lowest footprint for limited production area

PRODUCTIVITY / PROCESS UNITS

- Automatic sheet feeding from sheet stacker
- Electric-driven punching system
- Adjustable punching speed
- Optical sensor system from bottom for sheet alignment & positioning in punching position
- 3- / 4-up punching tools
- Automatic card stacking system to standard Mühlbauer card magazines
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, ABS; others on request
- Sheet size min. / max.: 295 x 360 mm / 405 x 640 mm
- Sheet thickness: 500 – 1,000 μm
- Punching speed: programmable, max. 0.4 s / cycle
- Punching tools: 3- / 4-up
- Product size: ID-1
- Punching accuracy (position): +/- 100 μm
- Throughput: up to 16,000 cards per hour with layout 4 x 8

- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



CP 2007/A - CP 2007/M

CARD PUNCHING SYSTEM

Mühlbauer's fully- and semi-automatic card punching systems CP 2007/A and CP2007/M are designed for the punching of plastic cards from sheets. The systems enable high-quality and high-volume production of standard material ID-1 cards or specially shaped cards (depending on tool design). The powerful hydraulic punching systems ensure continuous precision

with alignment to print mark. The tools are well proven with an extremely long life cycle. The possibility to choose between up to 6-fold punching layouts offer flexibility and the optimized design allows for a quick and easy changeover times. Depending on configuration and material, these systems can reach a throughput of up to 35,000 cards per hour.



CP 2007/A



CP 2007/M

KEY MODULES

-  Sheet input
-  Sheet cutter (optional)
-  Sheet alignment

-  Punching unit
-  Automatic skeleton ejection
-  Magazine card output

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic card punching system
- Manual / automatic sheet feeding system
- Optical sheet alignment & positioning system ensuring highest punching accuracy
- In-house tool manufacturing assuring highest life cycle of tools
- Special / customized tool designs
- Fast in-house regrinding service
- Upgradeable modular system design – on-site upgrade to automatic system
- Special shape tools available (including 2-step punching & cutting)

PRODUCTIVITY / PROCESS UNITS


- CP 2007/M based on manual sheet feeding
- CP 2007/A with automatic sheet feeding from sheet stacker
- Hydraulic-driven punching system (direct drive)
- Adjustable punching speed
- Optical sensor system top / bottom for sheet positioning in punching position
- 1- to 6-up punching tools
- Automatic card stacking system to standard Mühlbauer card magazines
- Magazine changer / buffers: CH 2007/3; CH 2007/B; CH 2007/LS for highest autonomy time & layout sorting
- Conveyor belt for special cards (shape, size & perforation)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, ABS, Paper; others on request
- Sheet size min. / max.: 290 x 360 mm / 810 x 760 mm
- Sheet thickness: 300 – 1,000 μm
- Punching speed / pressure: manually adjustable / 30 kN
- Punching tools: 1- to 6-up for ID-1 cards
- Product size: up to 205 x 260 mm
- Punching accuracy (position): +/- 150 μm
- Throughput: up to 35,000 cards per hour; depending on material & layout (with 6-up tool)



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



CP 2021/A - CP 2021/M

CARD PUNCHING SYSTEM

Mühlbauer's fully- and semi automatic card punching systems CP 2021/A and CP 2021/M are designed for the punching of Smart Cards from sheets. The systems enable the high-quality and high-volume production of ID-1 cards with capability of punching a wide range of materials, including polycarbonate. The powerful hydraulic punching systems ensure continuous

precision with alignment to print mark. The tools are well proven with an extremely long life time. The possibility to choose between of 1-, 2-, 3-, 4- or 5-fold punching layouts offers flexibility and the optimized design allows for quick and easy changeover times. Depending on configuration and material, these systems can reach a throughput of up to 31,000 cards per hour.



CP 2021/A



CP 2021/M

KEY MODULES



Sheet input



Sheet cutter (optional)



Sheet alignment



Punching unit



Automatic skeleton ejection



Magazine card output

FEATURES & TECHNICAL DATA

KEY FEATURES

- Solid machine design for high speed & high precision
- Optical sheet alignment & positioning system ensuring highest punching accuracy
- In-house tool manufacturing assuring highest life-cycle of tools
- Special / customized tool designs
- Fast in-house regrinding service
- Upgradeable modular system design – on-site upgrade to automatic system
- Most proven punching system for polycarbonate cards in the market

PRODUCTIVITY / PROCESS UNITS

- CP 2021/M based on manual sheet feeding
- CP 2021/A with automatic sheet feeding from sheet stacker
- Hydraulic driven punching system (direct drive)
- Programmable punching speed
- Optical sensor system top / bottom for sheet alignment & positioning in punching position
- 1- to 5-up punching tools for ID-1 cards
- Automatic card stacking system to standard Mühlbauer card magazines
- Magazine changer / buffers: CH 2021/3; CH 2021/B; CH 2021/LS
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Sheet materials: PVC, PC, ABS, paper; others on request
- Sheet size min. / max.: 210 x 330 mm / 810 x 760 mm
- Sheet thickness: 500 – 1,000 μm
- Punching speed / pressure: 25 – 200 mm / s / 100 kN (programmable)
- Punching tools: 1- to 5-up
- Product size: ID-1; others on request
- Punching accuracy: $\pm 100 \mu\text{m}$
- Throughput: up to 31,000 cards per hour; depending on material & layout (with 5-up tool)

- TAPE LAYERING
- SHEET HOT STAMPING
- FOIL PUNCHING
- INLAY PRODUCTION & TESTING
- SHEET COLLATING
- SHEET LAMINATION
- CARD PUNCHING
- CARD INSPECTION
- CARD HOT STAMPING



CI 100

CARD INSPECTION SYSTEM

Mühlbauer's CI 100 is an economic, automatic inspection system for ID-1 plastic cards in compact design. The basic system inspects the surface and prints on one side of the card. It provides automated 100% inspection of every card with a throughput of up to 5,000 cards per hour. The system can detect print and surface

deviations of plastic cards on the fly. This inspection system is extremely versatile with a variety of options allowing for customer specific configurations such as double-sided print and surface inspection, as well as one additional inspection station per side, for example fUV or micro text.



KEY MODULES

-  Card input magazine
-  Cleaning module
-  Card turning
-  Reject sorting
-  Print inspection
-  Surface inspection
-  Card output magazine

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic card inspection system
- Wide range of optical inspection parameters
- Independent optical systems for print inspection & surface inspection
- Software allowing visualization of each individual inspection station
- Statistic & reporting features; counting & sorting
- Customized extended statistic features (optional)
- Customized inspection algorithm development possible
- Advanced teach mode by reference card (golden template)
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Input card magazine with automatic card separation
- Surface & print inspection system for card front side / back side system (optional)
- Inspection features (optional)
- UV inspection
- Microtext inspection
- Magazine output changer
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Card materials: PVC, PC, ABS; others on request
- Card size / thickness: ID-1 / 350 – 1,000 μm
- Resolution print inspection: 75 μm / Pixel
- Resolution surface inspection: 75 μm / Pixel
- Optical system surface inspection: greyscale matrix camera
- Optical system print inspection: color matrix camera
- Throughput: up to 5,000 cards per hour; depending on process parameters

- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



CI 200

CARD INSPECTION SYSTEM

The CI 200 is an economic automatic inspection system for ID-1 plastic cards in compact design. The basic system inspects the surface and prints on one side of the card. It provides automated 100% inspection of every card with a throughput of up to 20,000 cards per hour. The system can detect print and surface deviations of plastic cards on the fly. This inspection system is

extremely versatile with a variety of options allowing for customer-specific configurations such as double-sided print and surface inspection, as well as one additional inspection station per side, for example for UV or micro text. Furthermore, output sorting is available in 2-fold, 4-fold or 6-fold with freely definable tray allocations.



KEY MODULES

-  Card input feeder
-  Cleaning module
-  Card turning
-  Card sorting
-  Print inspection
-  Surface inspection
-  Output trays

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic card inspection system
- Card feeding from input card stacker / card output to multiple card output conveyor
- Wide range of optical inspection parameters
- Independent optical systems for print inspection & surface inspection
- Software allowing visualization of each individual inspection station
- Statistic & reporting features; counting & sorting
- Customized extended statistic features (optional)
- Customized inspection algorithm development possible
- Advanced teach mode by reference card (golden template)
- MB INCAPE ready


PRODUCTIVITY / PROCESS UNITS

- Input card stacker with automatic card separation
- Surface & print inspection system for card front side / back side system (optional)
- Inspection features (optional)
- UV inspection
- Microtext inspection
- Sorting system 4- or 6-fold (optional)
- Magazine based card feeding & output (optional)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Card materials: PVC, PC, ABS; others on request
- Card size / thickness: ID-1 / 350 – 1,000 μm
- Resolution print inspection: 75 μm / Pixel
- Resolution surface inspection: 75 μm / Pixel
- Optical system surface inspection: greyscale matrix camera
- Optical system print inspection: color matrix camera
- Throughput: up to 20,000 cards per hour; depending on process parameters

- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 

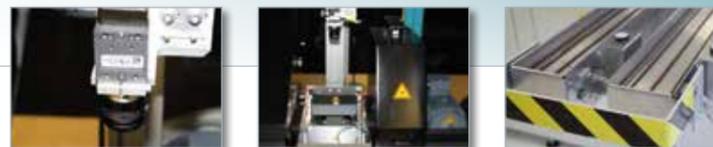

CI 36050

CARD INSPECTION SYSTEM

Mühlbauer's CI 36050 is a fully automatic high-speed inspection system for ID-1 plastic cards. The base system provides automated 100% inspection of every card with a throughput of 36,000 cards per hour for almost all inspection applications. The system can detect print and surface deviations of plastic cards on the fly. This inspection system is extremely versatile with a

variety of options allowing for customer-specific configurations such as double-sided print and surface inspection and up to 3 additional inspection stations per side, for example UV, micro text, DOVID, foil card or transparent card inspection. Furthermore, output sorting is available in 2-fold, 4-fold or 6-fold with freely definable tray allocations.



KEY MODULES

-  Card input feeder
-  Cleaning module
-  Card turning
-  Card sorting
-  Print inspection
-  Surface inspection
-  Output trays

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic card inspection system
- Wide range of optical inspection parameters
- Precise optical systems for print inspection & surface inspection
- Software allowing visualization of each individual inspection station
- Statistic & reporting features; counting & sorting
- Customized extended statistic features (optional)
- Customized inspection algorithm development possible
- Advanced teach mode by reference card (golden template)
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS

- Input card stacker with automatic card separation
- Surface & print inspection of card front side; back side system (optional)
- Optional inspection features
 - » UV / microtext
 - » DOVID inspection
 - » Foil card inspection (highly reflective)
 - » Transparent card inspection
 - » Customized inspection features
- Sorting system 4- or 6-fold (optional)
- Auto-teach function
- Magazine based card feeding & output (optional)
- Availability: up to 95%
- Yield: up to 99.7%

TECHNICAL DATA

- Card materials: PVC, PC, ABS; others on request
- Card size / thickness: ID-1 / 350 – 1,000 μm
- Resolution print inspection: 75 μm / pixel
- Resolution surface inspection: 75 μm / pixel
- Optical system surface inspection: greyscale matrix camera
- Optical system print inspection: color matrix camera
- Throughput: 36,000 cards per hour



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



CHS 6001

CARD HOT STAMPING SYSTEM

Mühlbauer's CHS 6001 can be easily integrated into any existing production environment, attaching security foils such as holograms, signature panels and / or other security features on the card front and / or back side with a maximum of two stamping units. Both sides of the card can be processed in one production cycle with the integration of the card turning station.

By using two stamping heads, the CHS 6001 reaches the market-wide best cost-per-card value. The CHS 6001 is a highly sophisticated card hot stamping solution for a wide application field, as well as for special applications. With a throughput of up to 5,500 cards / hour and in combination with the magazine buffer system, it is suitable for high-volume production tasks.



KEY MODULES

-  Magazine card input
-  Hot stamping (position 2 - optional)
-  Test stations (card orientation, input thickness measurement)
-  Card output
-  Hot stamping (position 1)
-  Reject bin
-  Card turning

FEATURES & TECHNICAL DATA

KEY FEATURES

- Automatic card hot stamping system for holograms, signature panels, scratch-off panels, positive / negative lettering etc.
- Quick change tools
- Card front side / back side processing
- Adjustable stamping position
- 100 % inline quality check
- In-house tool manufacturing & customization
- Highly accurate stamping positioning system
- Operator friendly teaching & operation
- MB INCAPE ready

PRODUCTIVITY / PROCESS UNITS


- Automatic card feeding / stacking from magazine to magazine
- Adjustable stamping position in x/y
- Adjustable stamping pressure
- Programmable stamping temperature
- Card flipping unit (optional)
- One hot stamping unit, extension to two stamping units on request
- Vision system for in-line quality check (optional)
- Magazine buffer for high autonomy time (optional)
- Availability: up to 95%
- Yield: up to 99.7%
- Environment conditions: Room temperature: 23°C; +/-3°C; Humidity: 50%; +/-10%

TECHNICAL DATA

- Card format / materials: ID-1 / PVC, PC, ABS; others on request
- Foil specification
- Core diameter: 1", 3"
- Max. outer diameter: 200 mm
- Width: 10 – 85 mm
- Hologram positioning: Adjustable pitch or printmark registration
- Stamping temperature: Up to 230 °C; programmable
- Stamping pressure: manually adjustable
- Standard stamps: MiniVisa; Visa; MasterCard; signature panels, other shapes are possible on request
- Throughput: up to 5,500 cards per hour; depending on material & process



- TAPE LAYERING 
- SHEET HOT STAMPING 
- FOIL PUNCHING 
- INLAY PRODUCTION & TESTING 
- SHEET COLLATING 
- SHEET LAMINATION 
- CARD PUNCHING 
- CARD INSPECTION 
- CARD HOT STAMPING 



QUALITY ASSURANCE

TESTING EQUIPMENT

CARD BODY TESTING EQUIPMENT



CSG 100 / 200
Card size gauge



CTG 100 / 200
Card thickness / cavity depth gauge



DLT 500
Peel force tester

SMART CARD TESTING EQUIPMENT



SCF 2300
Flexion test system



TWT 2500
Three wheel testing system



SCT 2400
Torsion test system



MAT 1230
Module adhesion testing system

CARD PERSONALIZATION TESTING EQUIPMENT



MEASURING MICROSCOPE
Measuring of embossing distances



COLOR DENSITOMETER
Measuring of color density



UV-LIGHT CABINET
Inspection of various printing processes

PRODUCT PORTFOLIO

YOUR ONE-STOP-SHOP TECHNOLOGY PARTNER

AUTOMATION

CARDS & EPASSPORTS

- IC Module Production
- Card Body & Smart Card Production
- Holderpage & Booklet Production
- Card & ePassport Personalization
- Packaging & Mailing

RFID / SMART LABEL

- Antenna Production & Inlay Assembly
- Converting
- Personalization

SEMICONDUCTOR BACKEND

- IC Module Production
- Carrier Tape Production
- Die Sorting

INDUSTRIAL INSPECTION SYSTEMS

- Packaging
- Metal Working
- Special Solutions

FUTURE TECHNOLOGIES

- Concentrator Solar Technology
- Flexible Solar Cell Technology
- Solar Panel Technology
- eSIM PERSO
- LED Technology

TECURITY®

- ID Card Solution
- ePassport Solution
- MB IDVERSO® Border Management Solution
- Driver's License & Vehicle Registration Solution
- Production Facilities

PARTS & SYSTEMS

- Precision Parts
- Surface Engineering

CONSULTING

- Identification of Customer Requirements
- Planning & Design
- Implementation
- Ongoing Operations

SERVICE

- Worldwide Locations for Service & Support
- Worldwide Spare Parts Supply
- Reaction Time & Full Service Contracts
- Service & Maintenance Management
- Updates & Upgrades
- Teleservice, Remote Access & Hotline (24 Hours)
- Training & Support on Different Levels
- Production & Administration Support

The information given in this document is subject to change without notice. The accuracy, completeness and timeliness of the information cannot be guaranteed. Mühlbauer Group does not make expressed or implied warranty of any kind and assumes no responsibility for errors or omissions. Any provided system information is binding only when submitted in relation with a project, i.e. in the form of an official offer and/or official technical data sheets.







MÜHLBAUER GERMANY

Mühlbauer Group Headquarters
Josef-Mühlbauer-Platz 1, 93426 Roding, Germany
Phone: +49 9461 952 0, Fax: +49 9461 952 1101
info@muehlbauer.de, www.muehlbauer.de

MÜHLBAUER USA

Mühlbauer Inc.
226 Pickett's Line
Newport News, VA 23603-1366, USA
Phone: +1 757 947 2820, Fax: +1 757 947 2930
info@muhlbauer.com, www.muhlbauer.com

MÜHLBAUER MALAYSIA

Muehlbauer Technologies Sdn. Bhd.
No. 3 Jalan TU 62, Taman Tasik Utama,
75450 Melaka, Malaysia
Phone: +60 6 2517 100, Fax: +60 6 2517 101
info@muehlbauer.com.my, www.muehlbauer.com.my

MÜHLBAUER SERBIA

Mühlbauer Technologies d.o.o.
Evropska 17, 22300 Stara Pazova, Serbia
Phone: +381 22 215 5100, Fax: +381 22 215 5130
serbia@muehlbauer.de, www.muehlbauer.de

MÜHLBAUER CHINA

Muehlbauer Technologies (Wuxi) Co., Ltd.
No 23. Huayi Road, Wuxi New District
214135 Wuxi, Jiangsu, China
Phone: +86 510 8190 0100, Fax: +86 510 8190 0101
info@muehlbauer.cn, www.muehlbauer.cn

MÜHLBAUER SLOVAKIA

Muehlbauer Technologies s.r.o.
Novozámocká 233, 94905 Nitra, Slovakia
Phone: +421 37 6946 000, Fax: +421 37 6946 501
info@muhlbauer.sk, www.muhlbauer.com



MÜHLBAUER GMBH & CO. KG

Josef-Mühlbauer-Platz 1 | 93426 Roding | Germany
Tel.: +49 9461 952 0 | Fax: +49 9461 952 1101
Mail: info@muehlbauer.de | Web: www.muehlbauer.de